




High quality, adjustable Catrike, with extra wide cross member and high seat. It is easy to get on and off yet very stable.



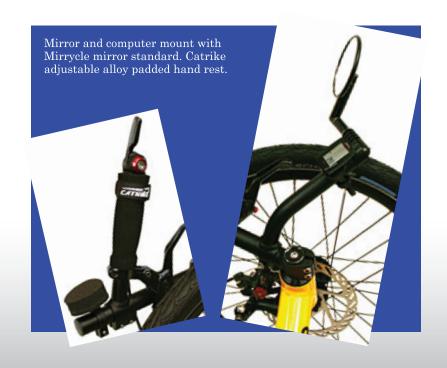

Catrike CNC sculpted dropouts.



Adjustable multi-purpose Catrike, with stable geometry and friendly ergonomics. It is great for novices and veterans alike.



Truly triangulated, air shock suspended Catrike. A versatile ride for your favorite trail, commuting or any adventure.



State of the art, architectural swing arm featuring a Monarch® Rock Shox that is adjustable, lightweight and silky smooth.



Lightweight
neck rest.
(Standard on Expedition
and 700. Available as an
accessory for all other
models)

- Oversized pad
- •Anti-rotation lock-pin
- Quick release adjustability



All-out speed Catrike. Its aerodynamic seating position, fast rolling 700c rear wheel and high gears, give it top performance.



Long wheel base sport-luxury Catrike. Capable of handling heavy loads for long distance touring and a fast performance ride.



FSA Gossamer Pro Triple with MegaExo bottom bracket.



Catrike alloy axle nut and black spokes.



Small space frame Catrike with big features. It has a narrow track, is quick and lightweight. Perfect for smaller riders.



MODELS DETAILS							
	MSRP	SIGNATURE COLOR	ALL COLOR OPTIONS				
Pocket	\$2,150	Saber Green					
Villager	\$2,350	Alpine White	Liquid Black, Moon Rock Silver,				
Trail	\$2,350	Shiny Mango	Alpine White, Shiny Mango, Saber Green, Electric Blue, Lava Red				
Expedition	\$2,550	Lava Red	(No additional cost for color options)				
Road	\$2,950	Electric Blue					
700	\$2,950	Liquid Black					

Technical Specs	POCKET	VILLAGER	TRAIL	EXPEDITION	ROAD	700		
Frame	TIG Welded Heat Treated 7005 Aluminum							
Wheel Base	35in (889mm)	36in (914mm)	39in (991mm)	43in (1092mm)	41.5in (1054mm)	46in (1168mm)		
Wheel Track	27.5in (699mm)	31in (787mm)	29in (737mm)	29in (737mm)	29in (737mm)	27.5in (699mm)		
Total Width	31in (787 mm)	34.5in (876 mm)	32.5in (826mm)	32.5in (826mm)	32.5in (826mm)	31in (787mm)		
Total Length**	68in (1727mm)	69in(1753mm)	73in (1854mm)	77in (1956mm)	75in (1905mm)	82in (2083mm)		
Seat Angle	41deg	41 <b>-</b> 51deg	45-52deg	37deg	39 <b>-</b> 47deg	25deg		
Weight*	33.0lb (15Kg)	34lb (15,5Kg)	34.5lb (15,7Kg)	35lb (15,9Kg)	37.5lb (17Kg)	33lb (15Kg)		
Seat Height	9in (229mm)	12.5in (318mm)	9in (229mm)	10in (254mm)	9.25in (235mm)	8.5in (216mm)		
Seat Width	14in (356 mm)	14in (356mm)	14in (356mm)	14in (356mm)	14in (356mm)	14in (356mm)		
BB Height	15in(381mm)	17in (432mm)	15.5in (394mm)	16.5in (419mm)	17in (432mm)	17.5in (445mm)		
Ground Clearance	4in (102 mm)	5.5in (140mm)	4in (102mm)	4.5in (114mm)	4in (102mm)	4in (102mm)		
Total Height	25in (635 mm)	28.5in (724mm)	25in (635mm)	26in (660mm)	24.5in (622mm)	26.75in (635mm)		
Height w/ Seat Folded	_	24.5in (622mm)	24.5in (622mm)	_	24.5in (622mm)			
Turning Circle	16ft (4,8m)	16ft (4,8m)	16.5ft (5,25m)	18ft (5,4m)	17ft (5,1m)	20ft (6m)		
Turning Radius	8ft (2,4m)	8ft (2,4m)	8.25ft (2,5m)	9ft (2,7m)	8.5ft (2,6m)	10ft (3m)		
Rider Weight Limit	225lb (102Kg)	275lb (125Kg)	275lb (125Kg)	275lb (125Kg)	275lb (125Kg)	275lb (125Kg)		
Rider X-Seam Range***	36-43in (91-109cm)	39-46in (99-117cm)	39-46in (99-117cm)	39-46in (99-117cm)	39-46in (99-117cm)	39-46in (99-117cm		

<sup>\*\*</sup> varies accordingly to riders height. \*\*\*X-Long Boom that adds 6" (15cm) available as an option for all models except Pocket.

-									
	Brake	Avid BB7 Disc Brakes							
	Brake Levers	Avid Speed Dial 7 Brake Levers							
	Front Derailleur	Microshift Triple							
	Rear Derailleur	SRAM X-7 10 Speed							
nts	Shifters	SRAM TT500 Bar End							
	Crankset	FSA Gossamer Pro Triple							
	Bottom Bracket	FSA Road MegaExo							
ner	Chainrings	30/39/52							
Compor	Chainguard	FSA Guard							
	Cassette	SRAM 11/36 10 Speed							
	Chain	FSA 10 Speed							
-	Idler	TerraCycle Alloy Cog ABEC 7							
	Headsets	FSA Zero Stack							
	Front Tires	406 Schwalbe Marathon Racer				406 Schwalbe Durano			
	Rear Tire	406 Schwalbe Mara	athon Racer	559 Schwalbe Marathon Racer		700c Schwalbe Durano			
	Shock				Rockshox Monarch R				

<sup>•</sup> Flag Mount & Flag • Computer Sensor Mount • Rear View Mirror • Combination Platform/Clipless Pedals • Brake Lever Velcro Strap for Parking • No Brake Steer • Self Accessories Centering • Ackerman Steering Compensation • Structural Front Boom • Quick-Release Indexing Boom Clamp • Aluminum Rod Ends • Low Friction PTFE Chain Tube

<sup>•</sup> Rear Fender (except 700) • Lightweight Seat Mesh with Zipper Pockets and Tire Pump Holder.



